



(一) Git

1.本地创建

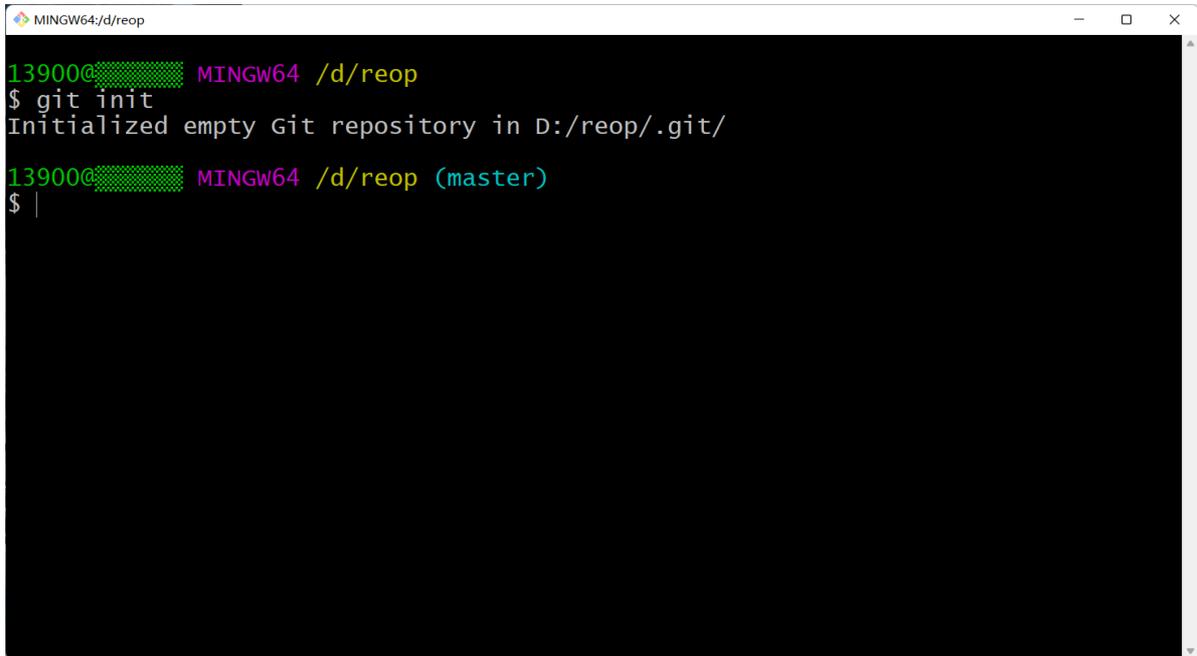

```
MINGW64/d/reop
13900@MINGW64 /d/reop
$ git init
Initialized empty Git repository in D:/reop/.git/
13900@MINGW64 /d/reop (master)
$ |
```

2.网络克隆

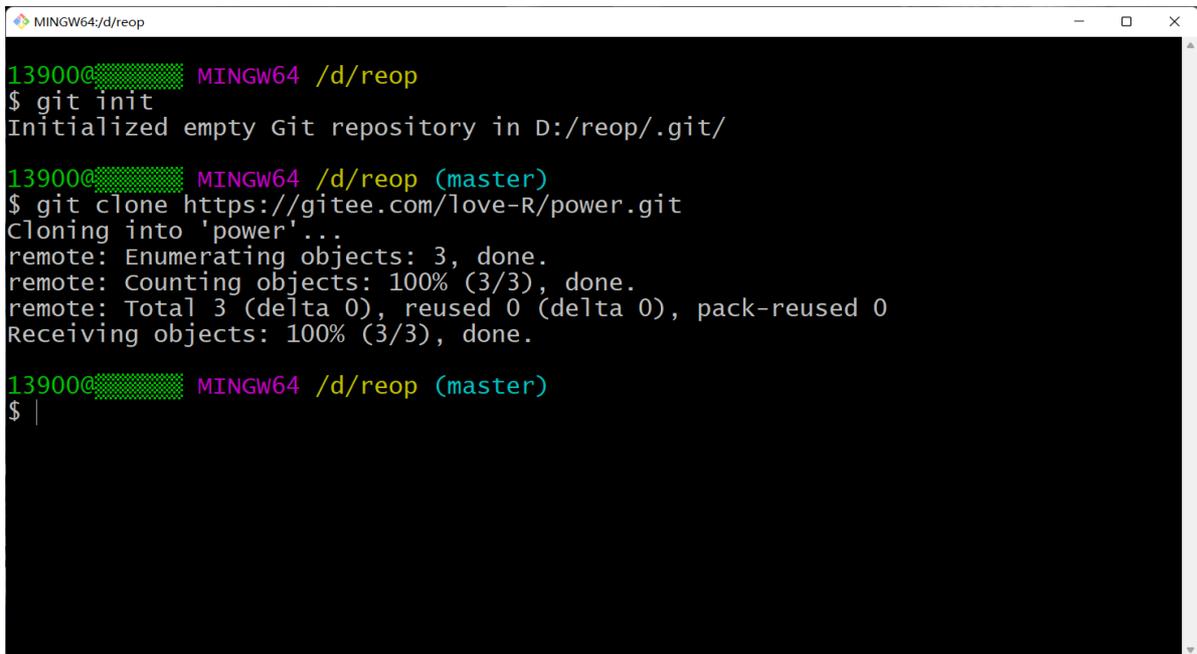

```
MINGW64/d/reop
13900@MINGW64 /d/reop
$ git init
Initialized empty Git repository in D:/reop/.git/
13900@MINGW64 /d/reop (master)
$ git clone https://gitee.com/love-R/power.git
Cloning into 'power'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
13900@MINGW64 /d/reop (master)
$ |
```

3.分支管理创建

```
MINGW64:/d/reop/power/branchname
13900@MINGW64 /d/reop/power/branchname (master)
$ git branch branchname
fatal: a branch named 'branchname' already exists

13900@MINGW64 /d/reop/power/branchname (master)
$ git branch
  branchname
* master

13900@MINGW64 /d/reop/power/branchname (master)
$
```

4.合并

```
MINGW64:/d/reop/power/branchname
13900@MINGW64 /d/reop/power/branchname (master)
$ git branch branchname
fatal: a branch named 'branchname' already exists

13900@MINGW64 /d/reop/power/branchname (master)
$ git branch
  branchname
* master

13900@MINGW64 /d/reop/power/branchname (master)
$ git merge
Already up to date.

13900@MINGW64 /d/reop/power/branchname (master)
$ |
```

5.删除

```
MINGW64:/d/reop/power/branchname
13900@MINGW64 /d/reop/power/branchname (master)
$ git branch branchname
fatal: a branch named 'branchname' already exists

13900@MINGW64 /d/reop/power/branchname (master)
$ git branch
branchname
* master

13900@MINGW64 /d/reop/power/branchname (master)
$ git merge
Already up to date.

13900@MINGW64 /d/reop/power/branchname (master)
$ git branch -d branchname
Deleted branch branchname (was e80207c).

13900@MINGW64 /d/reop/power/branchname (master)
$ |
```

(二) Markdown语法

(1) 1.#一级标题

2.##二级标题

3.###三级标题

4.####四级标题

5.#####五级标题

6.#####六级标题

(2) 字体

斜体文本

粗体文本

粗斜体文本

下划线

代码

删除线